

# USER MANUAL



**ADDRESS:**

No.10 Shilou Section, Shilian Road,  
Shilou Town, Panyu District,  
Guangzhou City, China 511447


Tel: +86 20 39280103  
Fax: +86 20 39280141  
Email: [sales@laxproaudio.com](mailto:sales@laxproaudio.com)





2×6.5" Two-Way Full Range Speaker

■ Dimension

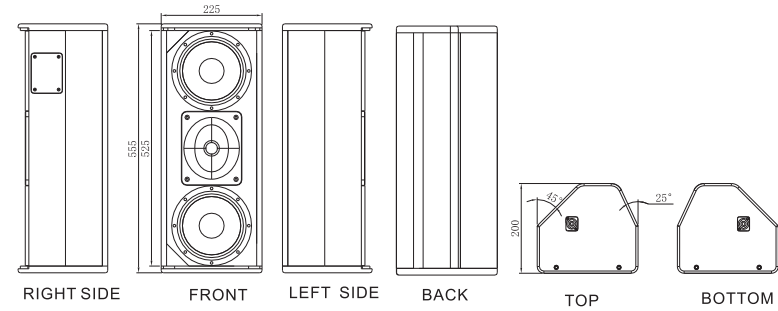

■ Technical Specification

Model	Agility Pro M
Type	2 x 6.5" Two-Way Full Range Speaker
Frequency response	90 Hz - 20 kHz (±2dB) 80 Hz - 20 kHz (-10dB)
Sensitivity(1W/1m)	97 dB
MAX SPL	123 dB(continuous) 129 dB (peak)
Rated power	400 W (AES)
Nominal Impedance	4 ohm
Connector	2 SPEAKON NL4MP
Dispersion(H×V)	80° × 50°
Dimension(WxDxH)	555 x 200 x 225 mm
Weight	11 kg

■ Application

- Conference room
- Fill sound for conference room
- Background music
- Surround sound
- Fill sound for stage


■ Features:

Agility Pro M is a ladder-shaped built-in two-way full range speaker. Use a 35mm HF driver consists of Aluminum film neodymium magnet, and two 6.5 " low driver with 50mm voice coil and Aluminum frame.

The box is composed of high strength plywoods, spray gray paint. The speaker unit is equipped with grey iron mesh and covered with sound transmission net cotton inside.

Small shape. Mainly use for live house as monitor wedge speaker and sound fills .

■ Frequency

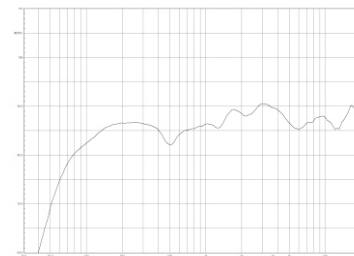

■ Impedance

